


- **Exclusive movementless design resists shock and vibration – no gears to wear or misalign resulting in increased instrument life**
- **Gas-operated molecular sieve**
- **No elevation error**
- **Mercury free**
- **One bulb size for all ranges**
- **±1% full-span accuracy**
- **Maxivision® dial**
- **Readily available – two to three weeks delivery**
- **Limited five-year warranty**

A high impact-resistant polished stainless steel case. Bayonet ring facilitates easy removal for glass replacement and pointer adjustment. A versatile case that enables surface or flush mounting. Available in 4½" dial size.

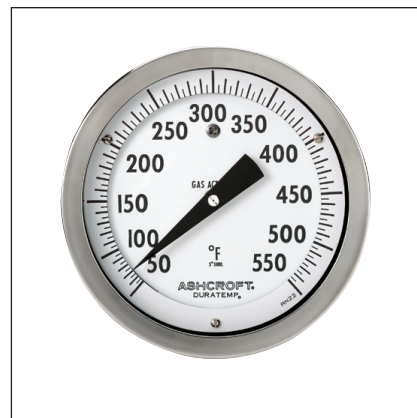

**SELECTION TABLE**

600A — 01		C01				B01		A1		L07		AK			
Table 1		Table 2				Table 3		Table 4		Table 5		Table 6			
CASE STYLE		CASE SIZE		MOUNTING				BULB STYLES*		ARMOR STYLE		LINE LENGTH		RANGES	
CODE	DESCRIPTION	CODE	SIZE	SURFACE		CONNECTION		CODE	DESCRIPTION	CODE	LINE LENGTH	CODE	SINGLE RANGES		
					FLUSH	LOWER	REAR								
01	ST. ST. BAYONET RING	C01	4½"	✓		✓		B01	12" Bendable extension with ½ NPT union connection	A1	Stainless Steel Spring	L01	5'	AB	-320/200°F
		C11	4½"		✓		✓	B03	Plain bulb with rigid extension, no union			L03	10'	AE	-100/100°F
								B08	Plain bulb with rigid extension, ½ NPT union on armor			L07	20'	AG	-40/180°F
								B17	18" Bendable extension with ½ NPT union connection			L09	30'	AK	20/240°F
								B18	24" Bendable extension with ½ NPT union connection			L13	50'	AL	50/300°F
												L19	80'	AN	50/550°F
														AR	50/750°F
														AT	400/1200°F
														AY	-200/100°C
														BL	-80/40°C
														BN	-40/80°C
														BS	0/120°C
														BT	10/150°C
														BU	0/300°C
														BW	0/400°C
														BJ	200/650°C
														<b>DUAL RANGES</b>	
														CE	20/240°F
															0/120°C
														CF	50/550°F
															0/300°C
														DR	50/300°F
															10/150°C
														DT	-40/180°F
															-40/80°C

\*Minimum recommended insertion length ("u" dimension) in liquids is 4 inches and in gases is 6 inches for standard ¾ x 3" bulb

**TO ORDER THIS DURATEMP 600A-01 THERMOMETER:**

**Select:**

1. Case Style: Stainless Steel/Bayonet Ring \_\_\_\_\_ Table 1 \_\_\_\_\_ **600A 01**

2. Case Size & Mounting: 4½" Surface, Lower \_\_\_\_\_ Table 2 \_\_\_\_\_ **C01**

3. Bulb Style: 12" Bendable Extension with Union Connection \_\_\_\_\_ Table 3 \_\_\_\_\_ **B01**

4. Armor Style: Stainless Steel Spring \_\_\_\_\_ Table 4 \_\_\_\_\_ **A1**

5. Line Length: 20 feet \_\_\_\_\_ Table 5 \_\_\_\_\_ **L07**

6. Temperature Range: 20/240°F \_\_\_\_\_ Table 6 \_\_\_\_\_ **AK**

7. Options: Stainless Steel Tag \_\_\_\_\_ (See Page 200) \_\_\_\_\_ **XNH**

Consult factory for guidance in product selection  
Phone (203) 385-0217, Fax (203) 385-0602 or  
visit our web site at [www.ashcroft.com](http://www.ashcroft.com)